


C1 Type Crystal

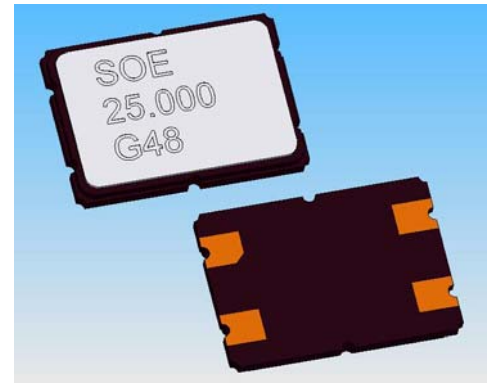

Features

- Typical 7.0 x 5.0 x 1.2 mm ceramic metal SMD package.
- Resistance welding for hermetical seal.
- Tape & Reel packaging for automatic assembly.
- Tight tolerance 10 ppm available.
- High frequency up to 50MHz fundamental.
- **Lead Free and RoHS compliant**

ORDERING GUIDANCE

Product Type	-	Oscillation Mode	Calibration Tolerance (ppm)	Temperature Stability (ppm)	Operation Temp Range (°C)	Load Capacitance (pF)	-	Frequency (MHz)
Code: Meaning	Dash	Code: Meaning	Code: Meaning	Code: Meaning	Code: Meaning	Code: Meaning	Dash	
C1: 7x5 SMD Crystal		1: Fund 3: 3 rd OT 5: 5 th OT	A: ±10 B: ±15 C: ±20 D: ±30 F: ±50 G: ±5 H: ±25 XX: Special	1: ±10 2: ±15 3: ±20 4: ±30 5: ±50 6: ±100 7: ±5 8: ±3 9: ±25 00: Special	A: -10~+60 B: 0~+70 C: -20~+70 D: -40~+85 E: -55~+125 F: -10~+70 G: -40~+60 H: 0~+60 I: -20~+60 J: -40~+105 K: -40~+70 L: -40~+125	0: Series XX: CL Value In pF		XXX.XXXXXX
Ordering Example: C1-1D4C18-20.000								
7x5 SMD crystal, Fund, ±30ppm@25°C, ±30ppm/-20°C~+70°C, CL=18pF, 20MHz								
Note: If any other requirements are needed, they should be specified in customers' order.								

Electrical Specification

Storage Temp. Range	-55°C to +125°C
Drive Level(DL)	50uW typ., 500uW Max.
Shunt Capacitance(C0)	7.0pF Max.
Insulation Resistance(IR)	500MΩ Min. @ 100V DC
Aging	±3ppm/year

Equivalent Series Resistance(ESR)

Frequency (MHz)	Mode	Max ESR (Ohms)
7.3728 – 8.000	Fund	80
8.001 – 12.000	Fund	60
12.001 – 20.000	Fund	40
20.001 – 50.000	Fund	30
36.000 – 50.000	3 rd O/T	80
50.001 – 125.000	3 rd O/T	60
100.000 – 150.000	5 th O/T	120

